

Pre Fabricated Bracket to support cantilever Loads


Material specifications	
Material	Base Plate : S235 JR or equivalent steel U Profile & Mounting Rail : DD11 or equivalent steel
Coatings	Galvanized, Hot-Dip Galvanized (HDG), Powder Coating*, Zinc Magnesium*

Applications

- Bracing for FXC Mounting Channels structures for carrying higher loads
- Supporting installation of medium to heavy-duty ventilation ducts, plumbing & firefighting pipes and cable trays

Features & Benefits

- Ease of installation with less components
- Prefabricated for rapid installation
- High load bearing capacity owing to special material properties and design.

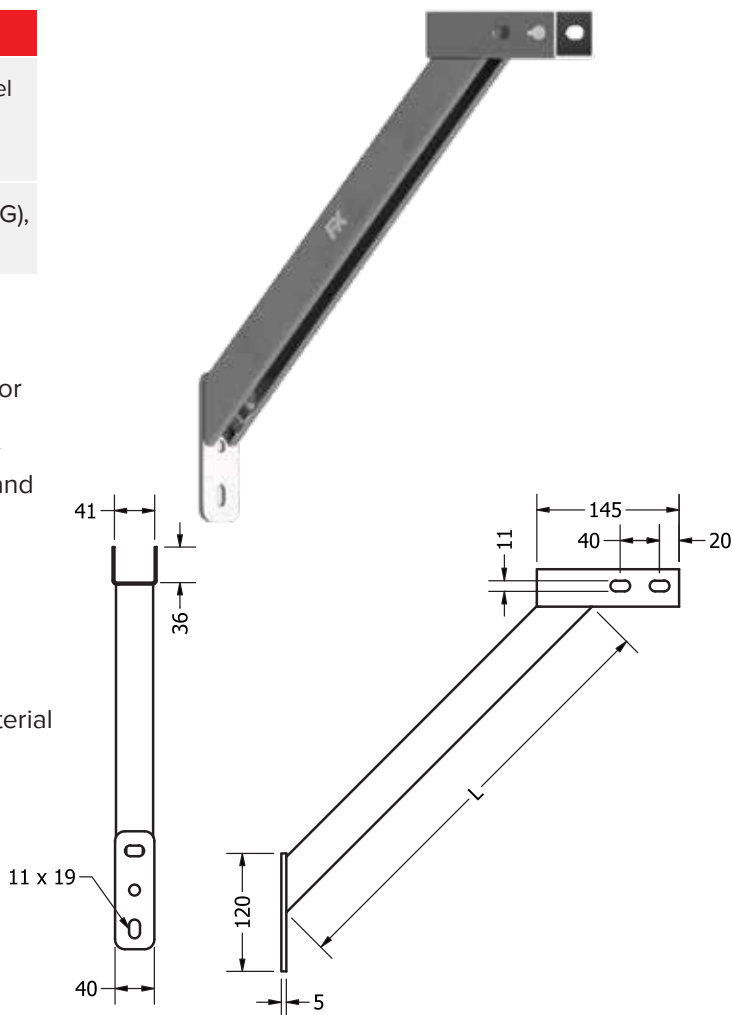

Select Variant

Article No.		Product Description	L (mm)	Max. Recommended Load (N)		Pack Size (Nos)
Galvanized (vz)	HDG (fvz)			Mounted on Channel	Mounted on Wall	
332000	332001	FXC Bracket Support, 440 mm, 38 24-40 120	440	2500	6000	1
332010	332011	FXC Bracket Support, 900 mm, 38 24-40 120	900	2000	3000	1

*Available on request