

Fixing element for cross connections of FXC Mounting Channels



| Material specifications |                                                                        |
|-------------------------|------------------------------------------------------------------------|
| Material                | DD11 or equivalent steel                                               |
| Coatings                | Galvanized, Hot-Dip Galvanized (HDG), Powder Coating*, Zinc Magnesium* |

### Applications

- Cross connection of FXC Mounting Channels
- Connecting element for planar grid structures

### Features & Benefits

- Easy to install with less components
- Ensures rotation-free FXC Mounting Channel structural connections
- Quick and efficient attachment of multiple support structure

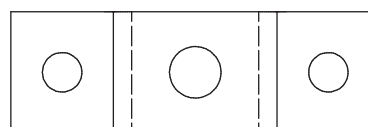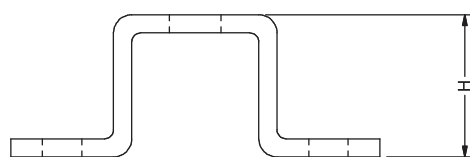

### Select Variant

| Article No.     |           | Product Description               | Height (H)<br>(mm) | Pack Size<br>(Nos) |
|-----------------|-----------|-----------------------------------|--------------------|--------------------|
| Galvanized (vz) | HDG (fvz) |                                   |                    |                    |
| 337600          | 337601    | FXC Cross Connector, 28 30        | 32                 | 25                 |
| 337610          | 337611    | FXC Cross Connector, 38 24        | 26                 | 25                 |
| 337620          | 337621    | FXC Cross Connector, 38 40        | 42                 | 25                 |
| 337630          | 337631    | FXC Cross Connector, 40 60        | 62                 | 25                 |
| 337650          | 337651    | FXC Cross Connector, 38 80, 40 80 | 82                 | 25                 |
| 337640          | 337641    | FXC Cross Connector, 40 120       | 122                | 25                 |

\*Available on request