FXR Bracket Support





Pre Fabricated Bracket to support cantilever Loads


Material specifications					
Material	Base Plate: S235 JR or equivalent steel U Profile & Mounting Rail: DD11 or equivalent steel				
Coatings	Galvanized, Hot-Dip Galvanized (HDG), Powder Coating*, Zinc Magnesium*				

Applications

- Bracing for FXR Mounting Rails structures for carrying higher loads
- Supporting installation of medium to heavy-duty ventilation ducts, plumbing & firefighting pipes and cable trays

Features & Benefits

- Easy to install with less components
- Prefabricated for rapid installation
- High load bearing capacity owing to special material properties and design.

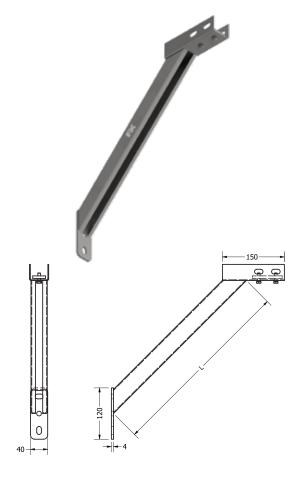

Select Variant

Article No.		Product Description	FXR Length (L)	Max. Recommended Load (N)		Pack Size	
Galvanized (vz)	HDG (fvz)	Froduct Description	Mounting Rail	(mm)	Mounted on Channel	Mounted on Wall	(Nos)
632000	632001	FXR Bracket support, 440 mm	41 21-41 82	440	2500	6000	5
632010	632011	FXR Bracket support, 900 mm	41 21-41 82	900	2000	3000	1

*Available on request

in.fixotec.global | 01